





- **Automatic charger** - no supervision required.
- Multi-stage WUoU charging curve
- 100 % Charge (all lead-acid batteries - gel or liquid)
- No need to disconnect the battery
- Protection of the onboard electronics
- Protection against polarity reversal or battery voltage errors
- Anti-Spark : no voltage in clamps
- Dual charging speed
- 3 LED indicators :
  - Power supply
  - Change in progress

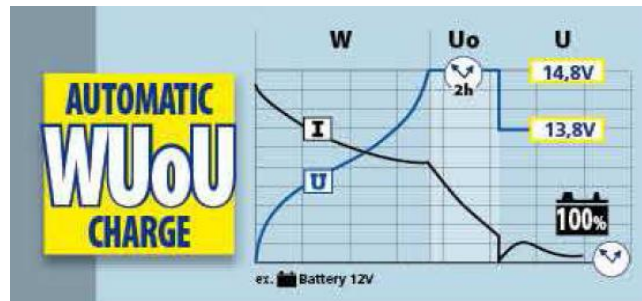

### TECHNICAL SPECIFICATIONS

Mains Supply	220VAC, 50HZ, 1 Ph
Main Unit Power	140W
Battery Voltage	6 - 12 V
Charge	2 
Effective RMS	9,5 A
Reg 1      Reg 2	3.5A      6.5A
Fuse	15 A
Dimensions (mm)	220 x 160 x 100 mm
Net Weight	3,6 kg

\* Specifications subject to change without notice

### PRECISION TESTING MACHINES PVT. LTD.

HEAD OFFICE: S-12, Okhla Industrial Area, Phase - II, New Delhi - 110 020 (India)

Tel.: 011-4161-0000 (4 lines), 2638-6612 Fax: 011-26383790

E-mail : sales@precisionworld.net / service@precisionworld.net / [www.precisionworld.net](http://www.precisionworld.net)